

## Introduction & Features

The RP4-GM41 interface allows the replacement of a factory radio in select General Motors vehicles with 29-bit LAN v2 44-pin connector radios. Using this interface will retain factory features such as steering wheel controls (SWC) & Warning Chimes when the original radio is removed. Use of this interface also allows you to program two radio functions to each SWC button by using short press long press dual command functionality. The RP4-GM41 also provides data bus driven outputs such as retained accessory power (RAP), vehicle speed sensor (VSS), illumination, reverse trigger and parking brake.

## Important Notes


- Once the radio has been removed, the vehicle settings which are normally selected through the factory radio can be accessed by downloading and installing the PAC Vehicle Settings program from <http://www.pac-audio.com/firmware/RP/index.html>. Please make your vehicle settings selections before removing the factory radio for optimal installation time.
- The radio select rotary switch on the side of the interface must be adjusted to the proper radio setting before plugging the interface into the vehicle (see below for setting chart).
- The interface comes pre-programmed for all of the vehicles factory SWC functions and does not require programming unless you wish to re-assign the SWC functions or utilize short press long press dual command functionality. The SWC can always be restored to default settings by pressing and releasing the program button on the side of the interface once and waiting 7 seconds for the LED to flash 4 times.
- The LED will flash whenever a SWC button is pressed.
- BAADIN22 antenna adapter sold separately

## Wiring Connection Chart


Interface Connector		Vehicle Connector		SWC Connector	
Red / White	Parking Brake Output (-)	Yellow	Battery +12v	Blue/Yellow	Kenwood, Newer JVC, OEM or Blaupunkt
Purple / White	Vehicle Speed Output	Black	Ground	3.5mm Jack	Alpine, JVC, Clarion, Fusion, Pioneer, Sony, Valor, Boyo, Dual, Lightning Audio, Visteon or Advent
Blue	Not Used	Blue/White	Not Used		
Blue / White	Not Used	White	Front L + input		
Red	Accessory Output (1 amp)	White / Black	Front L - input		
Orange / White	Illumination Output (+)	Grey	Front R + input		
Green	Reverse Output (+)	Grey / Black	Front R - input		
		Green	Rear L + input		
		Green / Black	Rear L - input		
		Purple	Rear R + input		
		Purple / Black	Rear R - input		
		Red/White RCA	Factory AUX Jack		

## Illustration / Schematic

### Wiring

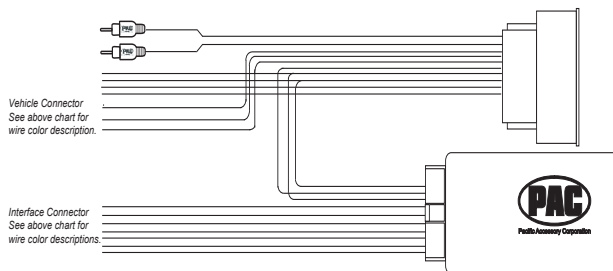

### SWC Connection

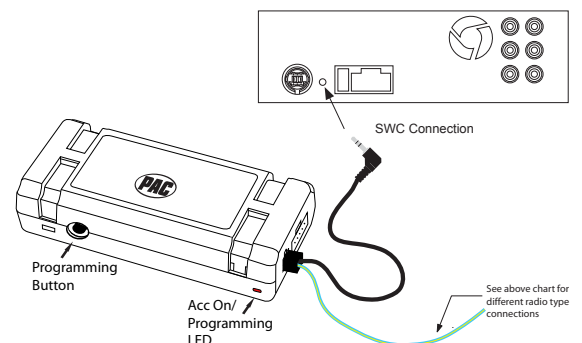

### Installation Steps

#### SET RADIO SELECT SWITCH



Alpine	JVC	Kenwood	Clarion	Pioneer/Other	Sony	Fusion
1	2	3	4	7	8	9

Other = Advent, BOYO, Dual, Lightning Audio, Visteon,

**1. The radio select rotary switch on the side of the interface must be adjusted to the proper radio setting before plugging the interface into the vehicle.**

2. Make all connections as described in the chart on page 3.
3. Connect the SWC wire according to the chart on page 1 (aftermarket radio MUST support a wired remote input).
4. If you wish to reassign functions to the SWC follow the programming instructions in the next section.

### Default Steering Wheel Control Programming

**IMPORTANT!** The interface comes pre-programmed for all of the vehicles factory SWC functions and does not require programming unless you wish to re-assign the SWC functions or utilize short press long press dual command functionality. The SWC can always be restored to default settings by pressing and releasing the program button on the side of the interface once and waiting 7 seconds for the LED to flash 4 times.

The Mute/End button has two functions. Pressing this button for less than 1.5 seconds will initiate the mute command. Pressing this button for more than 1.5 seconds will initiate the end command. This dual function button can also be reprogrammed to

#### Default SWC Button Assignments

	Alpine	JVC	Kenwood	Clarion	Valor	OEM	Sony/Pioneer	Fusion	Blaupunkt
<b>Volume +</b>	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +
<b>Volume -</b>	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -
<b>Source</b>	Source	Source	Source	Source	Source	Source	Source	Source	Source
<b>Track +</b>	Track +	Track +	Track +	Search +	Track +	Next	Track +	Track +	Track +
<b>Track -</b>	Track -	Track -	Track -	Search -	Track -	Previous	Track -	Track -	Track -
<b>Answer/Voice</b>	Receive	Receive	Receive	Receive	OK	Receive	Receive	N/P	OK
<b>Mute</b>	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute
<b>End</b>	End	End	N/P	End	N/P	End	End	N/P	N/P

### Optional Steering Wheel Control Programming

If you wish to re-assign the SWC functions, utilize the buttons that have no initial programming or utilize short press long press dual command functionality, the interface must be programmed in the specific order shown in the chart below. If you come across a function in the chart that your steering wheel does not have, or you do not want to program, press and release the program button on the side of the interface to skip that function. The LED will flash off and on confirming that you have successfully skipped that function and are ready to proceed to the next one.

#### Short Press Long Press Dual Command Functionality

This feature allows you to assign two aftermarket radio functions to each of the vehicles SWC buttons. It can be used with as many of the buttons as the user likes or none at all. When this functionality is implemented, quickly pressing and releasing a SWC button will initiate the short press command while pressing and holding a SWC button for longer than two seconds will initiate the long press command. Please note that no long press commands are programmed by default. If you wish to assign dual command functionality to the SWC please follow the programming steps on the next page.

### Optional Steering Wheel Control Programming (cont.)

#### Optional Programming Order

	Alpine	JVC	Kenwood	Clarion	Other*	Pioneer	Sony	Fusion
1	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +	Volume +
2	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -	Volume -
3	Mute	Mute	Mute	Mute	Mute	Mute	Mute	Mute
4	Preset +	Source	Source	Source	Preset +	Preset +	Preset +	Source
5	Preset -	Track +	Play	Search +	Preset -	Preset -	Preset -	Track +
6	Source	Track -	Track +	Search -	Source	Source	Source	Track -
7	Track +	Band/Disc +	Track -	Band	Track +	Track +	Track +	Audio
8	Track -	Preset/Disc -	Disc/FM +	Send/End	Track -	Track -	Track -	Power
9	Power	Select	Disc/AM -	Send	Band	Band	Band	
10	Enter/Play	Attenuation	Answer	End	N/A	Phone Menu	Reject Call/Source (Bluetooth equipped radios only)	
11	Band/Program	Phone Receive	Voice Dial			Answer Call	Answer/End Call	
12	Receive	Phone Reject	On Hook			End Call		
13	End	Voice Dial	Off Hook			VR		
14	VR	Power	Mute (Multimedia units only)					
15			Preset +					

\*Other = Advent, Boyo, Dual, Lightning Audio, Rockford Fosgate, & Visteon

#### Programming

1. Turn the key to the ignition position.
2. Press and release programming button on the side of the interface.
3. Within 7 seconds, press the button that is to be learned on the steering wheel. The LED will turn off when the button is pressed.

#### At this point you have two options:

- A. For short press functionality:** Release the button within 1.5 seconds. The LED will turn back on.
- B. For long press functionality:** Hold the button until the LED starts blinking. Release the button and the LED will go back to solid.

4. If you need to program more buttons, repeat step 3 for each additional audio function on the steering wheel.
5. If you come across a function in the chart that your steering wheel does not have, or you do not want to program, press and release the program button on the side of the interface to skip that function.
6. Once programming is completed, wait seven seconds. The LED will flash three times indicating end of programming.
7. Test the interface for proper functionality. Whenever a SWC is pressed the LED on the interface should blink. If any function does not work, repeat the programming steps

#### Testing & Verification

1. Turn the ignition on. The LED on the interface will turn on & the +12v accessory wire will turn on.
2. Turn on the radio & check balance & fade.
3. Verify that all SWC are functioning properly.
4. Turn off vehicle & remove key. RAP will be active & keep the radio on for 10 minutes or until the drivers door is opened.
5. The LED & radio will turn off when RAP turns off or the drivers door is opened.

#### Product Updates (Firmware)

The RP4-GM41 can be updated with new firmware as it becomes available using the PAC-UP interface updater (sold separately). Please visit [www.pac-audio.com/firmware](http://www.pac-audio.com/firmware) for available updates.

